




BY-WS1000

Windshield and Suspension System
for Shotgun Microphones
Instruction Manual


Product Structure

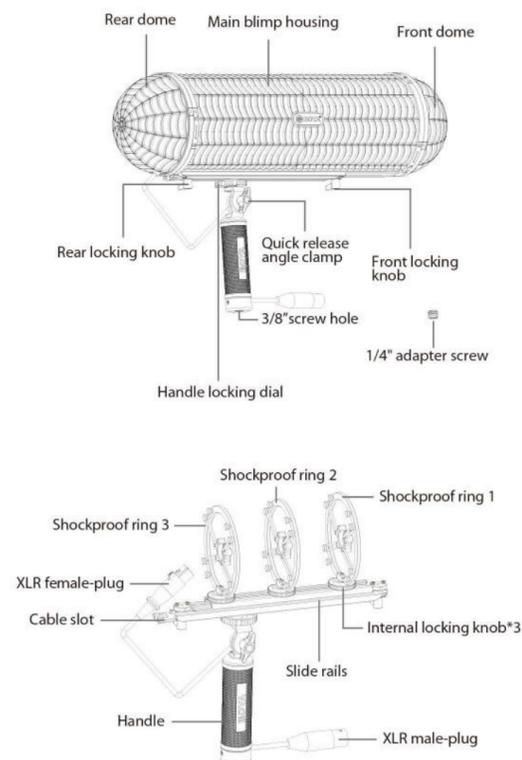

Adjustment

1. Handle angle

1) Initial default angle




2) Loosen the knob and adjust to desired angle



3) Tighten the knob after adjustment




2. Handle position

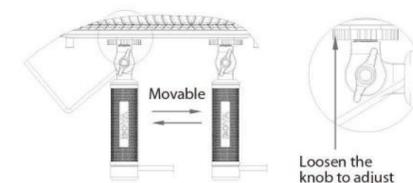

Operations

1. Unscrew and remove the rear dome

Clockwise to tight, counterclockwise to loose

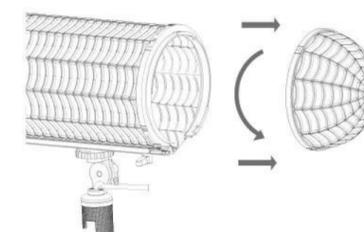


2. Loosen the front and rear knobs



3. Slide the suspension body out of the main blimp housing




4. Loosen the locking knobs to adjust position of shockproof rings

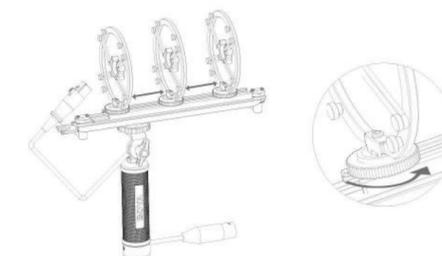


5. Place the microphone

NOTE: Fits up to 320mm in length and φ19-22mm shotgun microphone

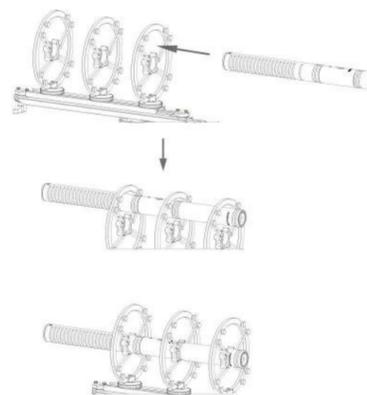


6. Connect the XLR plug



7. Place the suspension body back into the main blimp housing


1) Slide in and align the rails with the main blimp housing

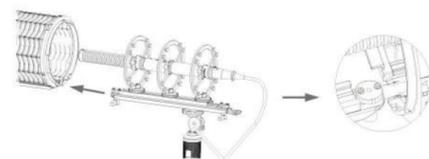

2) Tighten the front and rear knobs



3) Place the cable into the slot

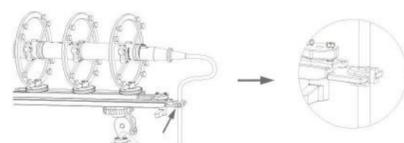


8. Replace and screw the rear dome




9. Using the fur windshield

1) Loosen the drawstring of fur windshield and stretch over the blimp body



2) Straighten the fur windshield, then tighten and lock the drawstring



Using indoor

Using indoor without main blimp housing



www.boya-mic.com

SHENZHEN JIAYZ PHOTO INDUSTRIAL., LTD.
The BOYA logo is a trademark which is registered and owned by Shenzhen Jiayz Photo Industrial., Ltd.
COPY RIGHT 2010-2020
Email: sales@boya-mic.com
www.jiayz.com